



LAURA METAAL
ROAD SAFETY

SafeZone™ Up to TL-4 Limited Deflection

leading the way in portable road barriers




Leading the way in work zone positive protection, SafeZone barrier from Laura Metaal Road Safety is the first MASH approved TL-4 Standard and Minimum Deflection steel barrier. Offering the narrowest footprint on the market at 19 inches SafeZone is the ideal barrier for bridge rehabilitation or confined work zones where every inch counts.

Our Quick Connect system allows rapid deployment of barrier at 1,000 feet per hour and numerous anchoring options ensure exact placement no matter what type of surface you encounter. Save over 80% on truck transportation costs while reducing carbon emissions versus portable concrete barrier.



SafeZone™

**Up to TL-4
Limited
Deflection**

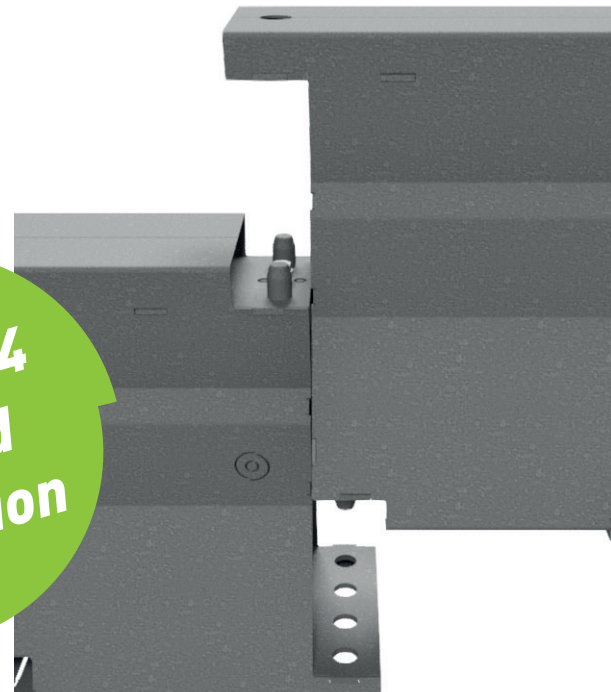






Manufactured with high quality S355 steel and galvanized to ASTM 123 standards SafeZone has a life cycle that far exceeds the current industry standards. Our list of optional attachments from gawk screen, to wheels, to a wide assortment of angle pieces ensure your project will be installed with state of the art barrier technology.

Laura Metaal Road Safety proudly offers a complete line of TL-2, TL-3 and TL4 rated steel barriers to ensure positive protection for your workers and the motoring public. For more information please visit our web site:

www.safezonebarrier.com
www.laurametaal.com

Advantages of the SafeZone:

- + first Mash approved TL-4 standard and minimum deflection steel barrier
- + quick connect for rapid deployment
- + save over 80 % on truck transportation costs
- + high quality S355 steel
- + galvanised to ASTM 123 standards
- + maintenance free

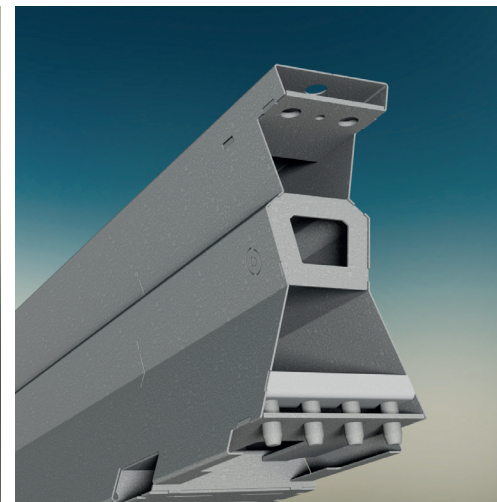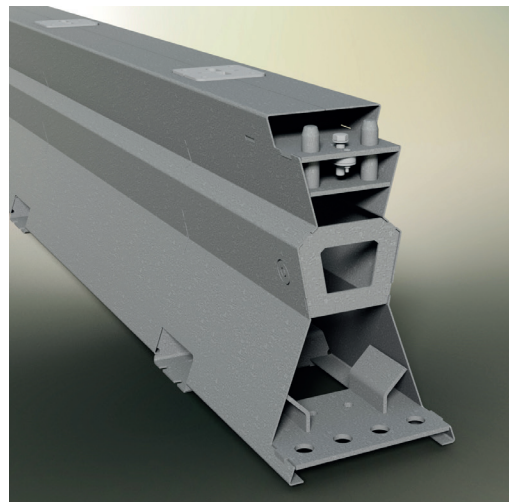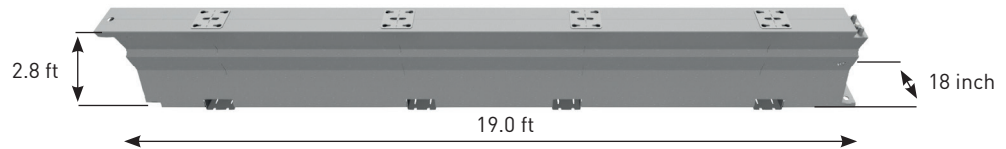

| Product | Testnorm | Vehicle class | Impact speed | Impact Angle | Test Result | Dynamic Deflection |
|----------|---------------------------|---------------|--------------|--------------|-------------|--------------------|
| SafeZone | TL3-11 | 2270p | 62 mph | 25° | Pass | 66.9 inch |
| SafeZone | TL3-11 Limited Deflection | 2270p | 62 mph | 25° | Pass | 23.8 inch |
| SafeZone | TL4-12 | 10000s | 56 mph | 15° | Pass | 81.5 inch |
| SafeZone | TL4-12 Limited Deflection | 10000s | 56 mph | 15° | Pass | 16.5 inch |

For more information or tailored advise on the application of road restraint systems please contact Laura Metaal Road Safety on:

Sam Arnold, Vice President of Sales North America: 702-204-0732
General enquiries and technical support: 800-758-3050 or 702-664-2009
or see www.laurametaal.com. It will be our pleasure to help you.

